


ENVI[®]

Passive Probe with extended Temperature Range
350 MHz, 400 V

About ENVI® Probes

The passive probe ENVI® is ideal for environmental testing, and measurements in climatic chambers from -55 °C to +155 °C. The world's first modern probe for this high temperature range with 300 V CAT II input voltage range, 10:1 divider and 350 MHz bandwidth is suitable for a variety of applications. Due to its BNC connector with read-out function the probe is universally connectable to any oscilloscope with BNC input and shows the correct measured voltage directly.

Specifications

ENVI® PHT 312-RO	
Order Number with Read-Out	835-312-001
Electrical Specifications	
Attenuation Ratio ($\pm 2\%$ at DC) (1)	10:1
System Bandwidth (-3 dB)	350 MHz
Rise Time (10% - 90%)	1 ns
Voltage Coefficient (at DC)	0.00025 % / V
Input Resistance (System) ($\pm 1\%$)	5 M Ω
Input Capacitance (System)	20 pF
Compensation Range	10 pF - 25 pF
Input Coupling of the Measuring Instrument	1 M Ω AC/DC
Maximum Rated Input Voltages, CAT II (2)	
Pollution Degree	3
Measurement Category II	300 V CAT II
Maximum Rated Input Voltages, No Measurement Category, not in CAT II, III, IV (2)	
Pollution Degree	3
No Measurement Category	400 V / 1250 V peak
Maximum Pulse Rating, No Measurement Category, not in CAT II, III, IV (2)	
Upulse (3)	<p>Upulse 1250 V (Step 0 V to 1250 V)</p> 

Mechanical Specifications	
Weight (Probe only)	93 g
Cable Length	2 m
Probe Tip Diameter	5 mm


Environmental Specifications		
Probe head and cable assembly		
Altitude	operating	up to 2000m
	non-operating	up to 15000m
Temperature Range	operating	-55 °C to +155 °C
	non-operating	-55 °C to +155 °C
Maximum Relative Humidity	operating	98 % relative humidity
BNC connector and (*) marked accessories		
Altitude	operating	up to 2000m
	non-operating	up to 15000m
Temperature Range	operating	0 °C to +50 °C
	non-operating	-40 °C to +71 °C
Maximum Relative Humidity	operating	80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C

Typical Voltage Derating



Note that the maximum input voltage rating of the probe decreases as the frequency of the applied signal increases.

Valid for no measurement category, not in CAT II, III, IV (*):

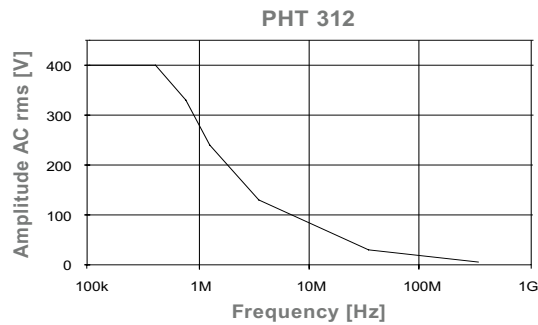


Typical Input Impedance



Note that the input impedance of the probe decreases as the frequency of the applied signal increases.

Valid for no measurement category, not in CAT II, III, IV (*):

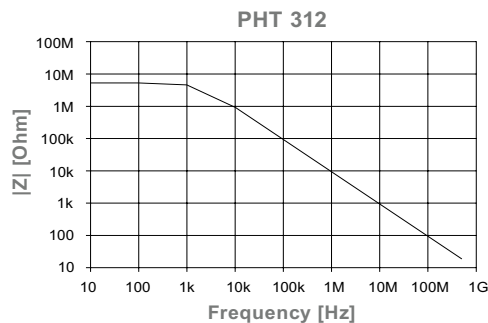

Probe Accessories

The parts supplied are **highlighted**, see also "Scope of Delivery".



Scope of Delivery

Accessories delivered with each probe are highlighted in the graphical overview.

Item	Qty	Item	Qty
Adjustment tool T	1	HT-ground lead 10 cm	1
BNC adapter 5,0-L	1	HT-ground lead 10 cm to 4 mm banana plug	1
2 footer positioner	1	Manual	1
Ground blade 2.5	1	Probe ENVI®	1
HT-dual lead adapter to 0.64 mm sockets	1	Solder-in contact pin 0.64 mm	10
HT-IC clip-M	1	Solid tip CuBe 0.8 mm	1
HT-IC clip-L	1	Spring tip 0.8 mm (1)	2
HT-insulating cap	1	Sprung hook 5.0-HT (2)	1

(1) plugged on probe

(2) installed in probe